

ELASTOFLUID 150

Quick-drying protective and decorative pigmented paint

Description: Solvent-based coloured coating, formulated with selected elastomeric resins and special additives.

Advantages:

- Ensures effective protection against UV rays and weathering.
- Has a greater resistance to standing water than common water emulsion paints.
- Extends the life of coats.
- Perfect adhesion.
- Fast drying of the film.
- Frost resistant.
- Resistant to low temperatures: can also be used in winter.
- High resistance on surfaces in industrial areas or near the sea.
- Effective deep penetration on surfaces such as bituminous surfaces and concrete.
- Applied on slated membranes, it protects and fixes the grit on the surface, preventing its detachment and increasing its life.

Applications: Suitable to coat:

- talc or slated polymer-bitumen membranes.
- Bituminous liquid waterproofing membranes (water or solvent based) also affected by the occasional presence of standing water.
- concrete and fibre cement.
- wood and metal surfaces, plaster, pantiles and roof tiles.
- it can be used as a paint for horizontal road markings for exteriors.

Surface preparation:

- Make sure that the surface is free from detached parts, loose debris or non-adherent parts, coatings, rust, powder, or release oils; carefully clean the surfaces, which must be sound and dry.
- Before applying, check that waterproofing ensures proper run-off of rainwater.
- Apply at temperatures between 0°C and +35°C; avoid extremely hot or cold conditions during application and drying of the film.

Application:

- The product is ready to use.
- Apply Elastofluid 150, after mixing, by brush, broom, roller or airless spray. It is possible to dilute the product up to a maximum of 10% using nitro or synthetic thinners.
- Apply in 2 cross coats. The second coat should be applied when the first is perfectly dry.
- Polymer-bitumen membranes with non-woven synthetic fabric finish on the surface allow for immediate painting, but more than two coats are required in order to obtain a sufficient covering effect.
- Use common synthetic thinners to clean tools.

ELASTOFLUID 150**Quick-drying protective and decorative pigmented paint**

Consumption: Total consumption of the product varies according to the nature and porosity of the surface to be treated, and is on average:


- On slated polymer-bitumen membranes: 500-700 g/m²
- On talc polymer-bitumen membranes: 250-350 g/m²
- On sheet metal: 200-300 g/m²
- On road surfaces and concrete: 200-300 g/m²

Warnings:

- Do not use indoors or in non-ventilated premises.
- We recommend not to exceed the above-mentioned consumption, as this could lead to an imperfect drying of the film in depth, due to the persistence, under the surface layer, of fractions of unevaporated solvent. The total waterproofness of the film dried on the surface prevents their normal evaporation.
- Do not apply on very hot surfaces as the process of formation of the paint film would be excessively accelerated with negative consequences on the adhesion of the product to the surface.
- Do not apply Elastofluid 150 on polymer-bitumen membranes based on styrene butadiene (SBS).
- We advise against applying the product on newly applied bituminous surfaces, which could still release hydrocarbons and cause adhesion problems of the film on the sheath.
- In any case, we recommend carrying out a preliminary application test to check whether the product is compatible with the surface.
- If the roof has insulating packages in the stratigraphy (situation not recommended, without prior check of the dimensional stability of the waterproofing layer to be protected with paint), a shorter restore is required.
- The product applied to polymer-bitumen membranes may form surface micro-cracks over time that will not, however, compromise the waterproofing.
- It can be stepped on in case of occasional maintenance.
- Do not use for surfaces or containers of edible liquids, for drinking water or that may come into contact with solvents or mineral oils.
- Do not paint tanks, basements or channels subject to strong water backpressure or pressurised water.
- Store in tightly sealed original packaging at a temperature no lower than +5 °C.
- Flammable product
- Do not expose to direct sunlight, temperatures higher than 40 °C, heat sources, open flames or other sources of ignition.
- Comply with the information on the safety data sheet.
- Consult the information at the bottom of this document.

Packaging: 1, 5, 10, and 20 kg metal pails.

Available colours:

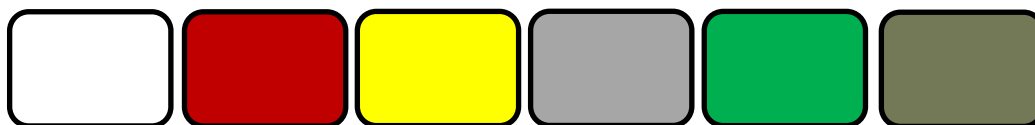

ELASTOFLUID 150

Quick-drying protective and decorative pigmented paint

Technical data:

MAIN CHARACTERISTICS		
Appearance		Dense liquid
Colour		Grey, White, Red, Green, Yellow, Military Green
Shelf life in closed original packaging		24 months
Closed-cup flash point	ASTM D3828-87	> 23 °C
Solid content (m/m at 130 °C)	EN ISO 3251	(60-68)%
Brookfield viscosity (at 20 °C, spindle 2; 10 rpm)	EN ISO 3219	(2100±400)cP
Density (at 20 °C)	EN ISO 2811-1	(1.23-1.31) kg/L
Drying time		30 - 60 minutes*

* Measurements have been recorded at a temperature of 23 °C and with 50% moisture. Declared data may vary depending on the thickness of the applied product and on the specific conditions of the construction site: temperature, humidity, ventilation, and absorbency of surfaces.

PERFORMANCE PROPERTIES - EN 1504-2 SURFACE PROTECTION SYSTEMS FOR CONCRETE (C COATINGS – PRINCIPLES: PI-MC-IR)		
Permeability to CO ₂	EN 1062-6	S _D > 50 m
Water vapour permeability	EN ISO 7783	Class I (S _D < 5 m)
Liquid water permeability	EN 1062-3	w < 0.1 kg/m ² ·h ^{0.5}
Tensile bond strength	EN 1542	≥ 1 N/mm ²

* Measurements have been recorded at a temperature of 23 °C and with 50% moisture. Declared data may vary depending on the thickness of the applied product and on the specific conditions of the construction site: temperature, humidity, ventilation, and absorbency of surfaces.



The advice and technical information provided represent HA ITALIA S.p.A.'s best knowledge of product properties and use. Considering the different situations of use of the products and factors beyond our control (media, working conditions, failure to comply with instructions), we cannot be held responsible for the results obtained. Before using the product, anyone who intends to make use of it is required to determine whether it is suitable for the intended use and assumes full liability for whatever may arise from its use.

HA Italia disclaims any and all liability arising from failure to observe the warnings mentioned in this data sheet and failure to comply with the requirements set out in the safety data sheet.

Data sheet no.: REV01 dated 04.04.2023



HA ITALIA S.p.A.
DIVISIONE PRODOTTI SPECIALI
 Viale della Scienza 78 -80 - 36100 Vicenza - Italy
 Stabilimento Via Vicenza 72 - 36015 Schio (VI)
 P.I. e C.F. IT00169590247 - Ph +39 0445 678000
 info@ha-italia.com - www.ha-italia.com - [in](#) ha italia s.p.a - [f](#) ha italia s.p.a

